


FORM PTO-1390 (REV 11-96)	U. S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 36-1431
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) 09/787198 Unknown
INTERNATIONAL APPLICATION NO. PCT/GB99/03347	INTERNATIONAL FILING DATE 8 October 1999	PRIORITY DATE CLAIMED 14 October 1998
TITLE OF INVENTION PROCESSING PLATFORM		
APPLICANT(S) FOR DO/EO/US BEDDUS et al		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</p> <p>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</p> <p>5. A copy of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>8. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</p> <p>9. <input type="checkbox"/> have been transmitted by the International Bureau.</p> <p>10. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>11. <input type="checkbox"/> have not been made and will not be made.</p> <p>12. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (U.S.C. 371(c)(3)).</p> <p>13. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>14. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p>		
Items 11. To 16. Below concern document(s) or information included:		
<p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98.</p> <p>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>14. <input type="checkbox"/> A substitute specification.</p> <p>15. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>16. <input type="checkbox"/> Other items or information.</p> <p><input type="checkbox"/> This application is entitled to "Small entity" status. <input type="checkbox"/> "Small entity" statement attached.</p>		

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) UNKNOWN 87198	INTERNATIONAL APPLICATION NO PCT/GB99/03347	ATTORNEY'S DOCKET NUMBER 36-1431								
17. <input checked="" type="checkbox"/> The following fees are submitted:		CALCULATIONS PTO USE ONLY								
BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5)): -- Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO\$1000.00 -- International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO\$860.00 -- International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO\$710.00 -- International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)\$690.00 -- International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)\$100.00		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:10%;"></td> <td style="width:40%;">\$</td> <td style="width:10%;">860.00</td> <td style="width:40%;"></td> </tr> <tr> <td></td> <td>\$</td> <td>0.00</td> <td></td> </tr> </table>		\$	860.00			\$	0.00	
	\$	860.00								
	\$	0.00								
ENTER APPROPRIATE BASIC FEE AMOUNT =										
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. 1.492(e)).										
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE							
Total Claims	21	-20 =	1							
Independent Claims	4	-3 =	1							
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)		\$270.00								
TOTAL OF ABOVE CALCULATIONS =		\$ 958.00								
Reduction by 1/2 for filing by small entity, if applicable. Small entity status must also be asserted. (Note 37 C.F.R. 1.9, 1.27, 1.28).		0.00								
SUBTOTAL =		\$ 958.00								
Processing fee of \$130.00, for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. 1.492(f)).		0.00								
TOTAL NATIONAL FEE =		\$ 958.00								
Fee for recording the enclosed assignment (37 C.F.R. 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property +		\$ 40.00								
Fee for Petition to Revive Unintentionally Abandoned Application (\$1240.00 - Small Entity = \$620.00)		\$ 0.00								
TOTAL FEES ENCLOSED =		\$ 998.00								
		Amount to be:								
		refunded	\$							
		Charged	\$							
a. <input checked="" type="checkbox"/> A check in the amount of \$998.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 14-1140 in the amount of \$_____ to cover the above fees. A duplicate copy of this form is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 14-1140. A duplicate copy of this form is enclosed. d. <input type="checkbox"/> The entire content of the foreign application(s), referred to in this application is/are hereby incorporated by reference in this application.										
NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be filed and granted to restore the application to pending status.										
SEND ALL CORRESPONDENCE TO:										
 SIGNATURE										
NIXON & VANDERHYE P.C. 1100 North Glebe Road, 8 th Floor Arlington, Virginia 22201 Telephone: (703) 816-4000										
Larry S. Nixon NAME										
25,640 REGISTRATION NUMBER		March 15, 2001 Date								

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

BEDDUS et alAtty. Ref.: **36-1431**Serial No. **Unknown**

Group:

National Phase of: **PCT/GB99/03347**International Filing Date: **8 October 1999**Filed: **March 15, 2001**

Examiner:

For: **PROCESSING PLATFORM**

* * * * *

March 15, 2001Assistant Commissioner for Patents
Washington, DC 20231

Sir:

PRELIMINARY AMENDMENT

Prior to calculation of the filing fee and in order to place the above identified application in better condition for examination, please amend the claims as follows:

IN THE CLAIMS

Please substitute the following amended claims for corresponding claims previously presented. A copy of the amended claims showing current revisions is attached.

3. (Amended) A platform according to claim 1, further comprising a resource broker and in which at least some communication between the resource locators is mediated by the resource broker.

5. (Amended) A platform according to claim 3, in which the resource broker includes:

a data interface arranged to receive capability

data and interface data from respective resource locators, and

a registry arranged to store the said capability data and interface data.

6. (Amended) A platform according to claim 3, in which a resource locator in a subsystem is arranged initially to read capability data and interface data for another subsystem from the resource broker, and subsequently communicates further data directly with the other subsystem using the interface of the subsystem identified in the said interface data.

7. (Amended) A platform according to claim 3, in which at least one of the subsystems is arranged to communicate directly with a selected other subsystem via a respective specific data interface and in which others of the subsystems are arranged to communicate with a selected other subsystem via an object bus.

9. (Amended) A platform according to claim 7, in which the said subsystems arranged to communicate via an object bus are arranged, in response to each new call, to read resource data from the resource broker.

17. (Amended) A method according to claim 14, in which, for at least one of the multiplicity of subsystems, step (a) is repeated in response to an event in the respective subsystem.

19. (Amended) A method according to claim 1 in which the communication of resource data between subsystems is mediated by a resource broker.

BEDDUS et al
Serial No. **Unknown**

REMARKS


Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "**Version with markings to show changes made.**"

The above amendments are made to place the claims in a more traditional format.

Respectfully submitted,

NIXON & VANDERHYE P.C.

By: _____



Larry S. Nixon

Reg. No. 25,640

LSN:Imy

1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

VERSION WITH MARKINGS TO SHOW CHANGES MADE

3. (Amended) A platform according to claim 1 [or 2], further comprising a resource broker and in which at least some communication between the resource locators is mediated by the resource broker.

5. (Amended) A platform according to claim 3 [or 4], in which the resource broker includes:

a data interface arranged to receive capability

data and interface data from respective resource locators, and

a registry arranged to store the said capability data and interface data.

6. (Amended) A platform according to [any one of claims 3 to 5] claim 3, in which a resource locator in a subsystem is arranged initially to read capability data and interface data for another subsystem from the resource broker, and subsequently communicates further data directly with the other subsystem using the interface of the subsystem identified in the said interface data.

7. (Amended) A platform according to [any one of claims 3 to 6] claim 3, in which at least one of the subsystems is arranged to communicate directly with a selected other subsystem via a respective specific data interface and in which others of the subsystems are arranged to communicate with a selected other subsystem via an object bus.

9. (Amended) A platform according to claim 7 [or 8], in which the said subsystems arranged to communicate via an object bus are arranged, in response to each new call, to read resource data from the resource broker.

17. (Amended) A method according to [any one of claims 14 to 16] claim 14, in which, for at least one of the multiplicity of subsystems, step (a) is repeated in response to an event in the respective subsystem.

19. (Amended) A method according to [any one of the preceding claims] claim 1 in which the communication of resource data between subsystems is mediated by a resource broker.

14/PRTS

1

PROCESSING PLATFORM

The present invention relates to a processing platform and particularly to telecommunications service platform using a number of loosely coupled
5 subsystems.

Platforms used, for example, to implement advanced services in a telecommunications network having an IN (intelligent network) architecture, may comprise a number of loosely coupled subsystems linked by a high speed network. This structure enhances the capacity and the resilience of the platform. The
10 resources of the platform are managed by a centralised management system that is responsible for allocating particular resources to given call and for reconfiguring the system, for example, in the event of one of the system components failing. As conventionally implemented, such a platform suffers the disadvantages of having a high management overhead and having poor scalability, that is, the platform is not
15 readily adaptable to provide increased capacity.

According to a first aspect of the present invention, there is provided a communications service platform comprising a multiplicity of loosely coupled subsystems, each of the subsystems including respective service processing resources and a respective resource locator, each resource locator including
20 means for communicating to others of the resource locators its identity and the availability of the resources in the respective subsystem, and means for receiving identity data and resource availability data for resource locators in others of the subsystems.

This aspect of the invention provides a service platform which maintains
25 the resilience and capacity of a distributed processing architecture while reducing the management overheads and providing greatly improved scalability. This is achieved by providing each subsystem with a resource locator which advertises the resources of the relevant subsystem and also listens to information from other subsystem. In this way the task of resource management and allocation is
30 distributed between the subsystems, and the system as a whole is provided with a mechanism for recognising and responding to the addition of new subsystems.

The resource locators may be arranged to communicate directly by peer-to-peer signalling. Preferably, however, the platform includes a resource broker and communication between the resource locators is mediated by the resource

broker. The resource broker may be located in one of the service processing subsystems, or may be located in a dedicated platform. The resource broker may include a data interface arranged to receive capability data and interface data from respective resource locators, and a registry arranged to store the said capability data and interface data. Preferably a resource locator in a subsystem is arranged initially to read capability data and interface data for another subsystem from the resource broker, and subsequently communicates further data directly with the other subsystem using the interface of the subsystem identified in the said interface data.

10 The system developed by the present inventors is not limited to use in communications systems but may also be used in a general computing environment.

According to a second aspect of the present invention there is provided a computing platform comprising a multiplicity of loosely coupled computing
15 subsystems, each of the said subsystems including respective data processing resources and a respective resource locator arranged to advertise its identity and the loading of the respective resources and to receive resource signalling from others of the resource locators .

According to a third aspect of the present invention, there is provided a
20 method of operating a communications system, the system including a multiplicity of processing subsystems and a network interconnecting the multiplicity of subsystems, the method comprising;

a) communicating from a resource locator in a respective one of the multiplicity of subsystems to resource locators in others of the multiplicity of
25 subsystems data indicating the identity of the said one subsystem and the availability of resources in the said one subsystem

b) repeating step (a) for each other of the multiplicity of subsystems:

c) when one of the multiplicity of subsystems, in the course of processing a call, requires resources not present locally in the said subsystem:

30 i) identifying from the said data communicated to the resource locator of the said one subsystem another subsystem having the said resources;

ii) accessing the said subsystem via the network.

According to a fourth aspect of the present invention, there is provided a communications system comprising:

- a plurality of call processing subsystems;
 - a network interconnecting the plurality of call processing subsystems;
 - a resource broker connected to the network, the resource broker including
 - a data interface arranged to receive capability
- 5 data and interface data from respective call processing subsystems, and
- a registry arranged to store the said capability data and interface data.

The term "call processing subsystem" is used here broadly to encompass systems ancillary to the processing of a call, such as, e.g., an Email server, a

10 mobility application platform or an interactive voice response (IVR) platform, as well as systems, such as a communications server, which are directly involved in the handling of a call.

- 15 Systems embodying the present invention will now be described in further detail, by way of example only, with reference to the accompanying drawings in which;

Figure 1 is a schematic of network embodying the invention;

Figure 2 is a diagram showing the structure of a service control point in

- 20 Figure 1;

Figure 3 is a schematic of a network employing peer-to-peer signalling;

Figure 4 is a schematic of a network employing a broker;

Figure 5 is a diagram showing interactions between a broker and components;

- 25 Figure 6 is a schematic showing an architecture implementing the invention;

Figure 7 is a class diagram for an implementation of the architecture of Figure 6;

Figure 8 is a message flow diagram showing a first scenario;

- 30 Figure 9 is a message flow diagram showing a second scenario;

Figure 10 is a schematic of an implementation of the architecture of Figure 6 across different networks;

Figure 11 is a diagram illustrating different interface types in a system embodying the invention;

Figure 12 is a diagram showing the structure of a resource broker;

Figure 13 shows a system in which components incorporate both type 1.0 and type 2.0 interfaces

Figure 14 shows a personal mobility service implemented using the architecture of Figure 6.

A telecommunications network which uses an IN (Intelligent Network) architecture includes a service control point 1, which is also termed herein the Network Intelligence Platform (NIP). The service control point 1 is connected to trunk digital main switching units (DMSU's) 2,3 and to digital local exchanges (DLE's) 4,5. Both the DMSU's and the DLE's function as service switching points (SSP's). At certain points during the progress of a call, the SSP's transfer control of the call to the service control point. The service control point 1 carries out functions such as number translation and provides a gateway to additional resources such as a voice messaging platform. The network also includes a second service control point 6, which in this example runs customer mobility applications. The two service control points are connected to each other and to the other components via a broadband signalling network 7.

Figure 2 shows the structure of the service control point 1. A service management server is connected via an FDDI optical fibre LAN 21 to an overload control server (OCS) and to transaction servers (TS). The overload control server monitors call rates and initiates action to protect the SCP and other elements of the network from overload. For example the OCS may send a call-gapping instruction to an originating exchange. Additionally or alternatively, a call-gapping instruction may be sent to the broker, so that the broker rations the availability, e.g., of switching resources at the originating exchange so as to protect other resources downstream of the originating exchange. The transaction servers implement advanced service control functions such as, for example number translation and call plans. The OCS and transaction servers are connected via a second FDDI LAN 22 to communications servers (CS) which are connected to an SS7 (ITU Signalling System no. 7) signalling network. A global data server (GDS) is also connected to this second LAN. The GDS records call statistics and may also be used in the operation of overload control functions.

Figure 3 is a simplified schematic of the network of Figure 1, illustrating a first implementation of the present invention. The Figure shows a first SCP 31, a second SCP 32 and a DMSU 33. These components constitute loosely coupled subsystems of a platform which runs one or more IN services. The subsystems are

5 connected by a broadband signalling network 34, for example an FDDI LAN. As indicated by the key to the Figure, each subsystem includes call processing resources of different types and also a resource locator 35. The first SCP includes resource types 1 and 2 which might correspond, for example, to a VPN (virtual private network) control function and to a number translation function

10 respectively. The second SCP includes type 1 resources, and the DMSU includes resource type 3, for example a call switching function. Each locator advertises to all other locators, the identity and location of the subsystem, the resources available at that location and, for example, the loading of the resources. For example the locator in the first SCP 31, when the SCP is initiated, broadcasts to

15 the other resource locators, a message in the form (SCP1; address1; type 1, 50%; type 2, 90%) where the first field is the identity, the second field is the address, and the subsequent fields are resource types and include a measure of resource loading. This message is received and stored by the resource locators in the other subsystems, and they in turn broadcast resource messages which are received by

20 the resource locator in the SCP 31. The step of broadcasting resource messages is repeated periodically, with a frequency chosen to balance the need of the system to re-balance resources after a subsystem failure, or after incremental changes in the proportion of free resources in a subsystem, against the need to minimise signalling overheads. In the present example, resource locators re-

25 transmit a resource message every 10 seconds. Then, for example, if a call originating at the DMSU is making use of VPN resources in the first SCP, and the first SCP fails, the failure will become apparent within, at most 10 seconds, and the DMSU resource locator may identify alternative resources in the second SCP. The absence of an expected update is interpreted by the resource locators as an

30 indication that the corresponding resources have become unavailable. In addition, subsystems may update the resource locators in response to events within that subsystem. For example, a subsystem may be programmed to update the resource locators whenever its loading changes by more than a predetermined threshold, e.g. 20%.

Figure 4 is a schematic illustrating a second implementation of the invention. In this example, in addition to the first and second SCP's and the DMSU described above with reference to Figure 3, the system also includes a resource broker 40. The resource broker includes, in addition to its own resource locator 41, a data store 42 which holds a registry of data communicated by other subsystems, and an authentication processor 43 which authenticates data received from the subsystems prior to entering the data in the registry. The broker may be implemented on a commercially available system such as that available from Visigenics as the Visigenics ORB (object request broker) running, for example, on a Digital SPARC Ultra (trademark) workstation. As shown in Figure 5, a subsystem, here termed a "component", must first authenticate itself with the broker, for example using a password or a digital signature, and agree a security mechanism for further exchanges. The component then registers its interfaces with the broker. For example, a communications server might register an INAP communications channel at a specified network address. From this point, the component can discover the interfaces of other components within the system by reference to the registry in the broker. Once the component understands the interfaces of other components it can communicate freely with the other components without further reference to the broker.

Figure 12 shows in further detail the structure of the resource broker 40. It comprises a resource registry, a service registry, and modules for authentication, registration and discovery. Tables 1 and 2 below show examples of the contents of the resource registry and service registry respectively. Each resource in the resource registry may have linked with it a number of entries in the service registry.

TABLE 1

Name: Athena
Processor: Digital SPARC Ultra
Address: 132.14.32.71
Function: Call Control Server

TABLE 2

Call Control:INAP

no. RANGE 64XXXX-67XXXX
Network Operator: BT
Capacity: 100 cps
Security parameters:
authentication level
signature
Interface: VIPER 1.0

Figure 6 shows an overview of an architecture that is implemented using a resource broker as described above with reference to Figures 4 and 5. The broker and the network used by the subsystems to communicate with the broker together provide a brokered environment 60. In this example, the subsystems connected to the brokered environment 60 include a PSTN network 61, a gatekeeper 62 for voice over IP (internet protocol) services, fax resources 63, an Email server 64 and a voice mail server 65. A number of applications use the resources of the subsystems 61-65. These applications locate the appropriate resources using the resource broker contained within the brokered environment 60. This implementation is termed by the inventors the "VIPER" architecture. The architecture provides for two types of interfaces, termed by the inventors VIPER 1.0 and VIPER 2.0. As illustrated in Figure 11, VIPER 2.0 interfaces provide for communication between subsystems via an object bus 110. Subsystems using VIPER 2 interfaces request resources from a resource broker on a per call basis and communicate using, e.g., the CORBA protocol. VIPER 1 interfaces bypass the object bus and use specific protocols such as INAP to communicate with other systems. Subsystems with VIPER 1 interfaces register and discover resources and interface details with the resource broker when the subsystem is initialised, but do not communicate with the resource broker for subsequent calls. Such subsystems using VIPER 1 interfaces then communicate with other subsystem using protocols specific to the subsystem, for example INAP in the case of a communications server communicating with a transaction server.

In operation, a subsystem such as a communications server may initially download copies of service and resource registry data from the resource broker to form a locally cached copy of the resource broker. For example, in Figure 11, the

communications server CS may optionally include a locally cached broker (LCB), as shown in dashed lines in the Figure. Then discovery operations may be carried out using the locally cached copy of the resource broker. In this case, even where a VIPER 2.0 interface is used, it is not necessary for signalling to pass between the communications server and the remote broker on every call. Instead, data passes between the remote broker and the communications server only intermittently when it is necessary to refresh the locally cached resource broker. Although the communications server, if it employs a VIPER 2.0 interface, still interrogates the resource broker for each new call, it is in general the locally cached broker that is used for this purpose.

Figure 7 is a class diagram showing an implementation of the architecture of Figure 6. This diagram is generated using the Rational ROSE software engineering tool and provides a basis, using that tool, for generating, e.g., Java code implementing the invention. Rational ROSE is available commercially from Rational Software Corporation. In this implementation, the subsystems that interact using the broker are termed "plugins".

Figure 8 shows a network operator bringing a VIPER broker, a VIPER Cambridge Transaction Server and a VIPER Cambridge Communications Server into service. "Cambridge" is the name given to the SCP illustrated in Figure 2. After registration and discovery is complete, an incoming call triggers an INAP (Intelligent Network Application Protocol) IDP (initial detection point) at a DLE. The DLE is referenced GPT_SSP in the diagram. The call is cut-through the VIPER middleware. Since the communications server CS and transaction server TS have both registered VIPER 1.0 interfaces with the resource broker, the CS does not have to ask the broker each time a call is received for the address of a suitable service resource or "plugin". Instead the CS and TS communicate directly using an INAP interface and bypassing the object bus. After location lookup is performed, an INAP connect is also cut-through the VIPER middleware back to the SSP. The following events and messages are shown in Figure 8:

- 1: Network operator brings the VIPER broker into service.
- 2: VIPER broker registers its services with itself if necessary.

3: Network operator brings the VIPER Cambridge Transaction Server into service.

4: VIPER Cambridge Transaction Server registers itself as a PlugIN with the VIPER broker.

5

5: VIPER Cambridge Transaction Server registers the services it supports with the VIPER broker.

6: Network operator brings the VIPER Cambridge Communications Server into
10 service.

7: VIPER Cambridge Communications Server registers itself as a PlugIN with the VIPER broker.

15 8: VIPER Cambridge Communications Server registers the services it supports with the VIPER broker.

9. VIPER Cambridge Transaction Server requests the address of the PlugIN associated with 'name' (in this case, VIPER Cambridge Communications Server).

20

10. VIPER Cambridge Communications Server requests the address of the PlugIN associated with 'name' (in this case, VIPER Cambridge Transaction Server).

11. GPT SSP sends an INAP Initial Detection Point (IDP) to the VIPER Cambridge
25 Communications Server.

12. VIPER Cambridge Communications Server sends a INAP IDP to the VIPER Cambridge Transaction Server.

30 13. VIPER Cambridge Transaction Server does an internal location lookup, then sends an INAP connect to the VIPER Cambridge Communications Server.

14. VIPER Cambridge Communications Server sends an INAP connect to the GPT SSP.

Figure 9 shows the message flows involved in a second scenario, with a network operator bringing a VIPER broker, a VIPER Mobility Server and a VIPER Cambridge Communications Server into service. The VIPER mobility server may be, for example, the SCP 6 running a mobility application illustrated in Figure 1. Once registration is complete, an incoming call triggers an INAP IDP into the VIPER middleware. A communications server CS creates a call model (labelled "INAP call" in Figure 9) and passes control of the service to that call model. The call model communicates with the resource broker to identify an application that is capable and ready to provide the resources required by the service. That application, if not already running, is created. The call model then request the application, in relation to this call, to perform a location look-up for the called party. On completion of the look-up, a mobile address returned by the look-up is passed to the communications server and the VIPER middleware send an INAP connect to the SSP.

1: Network operator brings the VIPER broker into service.

2: VIPER broker registers it services with itself if necessary.

3: Network operator brings the VIPER Mobility Server into service.

4: VIPER Mobility Server registers itself as a PlugIN with the VIPER broker.

5: VIPER Mobility Server registers the services it supports with the VIPER broker.

6: Network operator brings the VIPER Cambridge Communications Server into service.

7: VIPER Cambridge Communications Server registers itself as a PlugIN with the VIPER broker.

8: VIPER Cambridge Communications Server registers the services it supports with the VIPER broker.

9. GPT SSP sends an INAP Initial Detection Point (IDP) to the VIPER Cambridge Communications Server.

5 10 & 11. The VIPER Cambridge Communications Server creates a new call model to handle this service and then initiates the Call Model's constructor.

12. The Call Model requests from the VIPER broker the address of the PlugIN (in this case, the VIPER Mobility Server) capable of providing the service described
10 within the service descriptor.

13, 14 & 15. The Call Model requests from the VIPER Mobility Server the address of the application capable of servicing the request. This causes the VIPER Mobility Server to create a Roaming Application and then initiate the Roaming Application's
15 constructor. Flow 14 is optional depending on whether the Roaming Application is active or not.

16. The Call Model sends a VIPER 2.0 equivalent of an INAP IDP to the Roaming Application.
20

17. The Roaming Application performs a location lookup.

18. The Roaming Application sends a VIPER 2.0 Connect to the Call Model.

25 19. The Call Model sends an internal PlugIN connect to the VIPER Cambridge Communications Server.

20. The VIPER Cambridge Communications Server send an INAP connect to the GPT SSP.
30

Figure 10 illustrates an implementation of the VIPER architecture which provides a service platform which is distributed over different networks that may be located in different continents. In this example a customer at a customer

terminal 100 is registered with a mobility application resident on a first application server connected to a first broadband signalling network e.g. in the UK. The customer terminal is connected via a digital local exchange DLE to a second broadband signalling network, e.g., in the US. The first and second national
5 networks are interconnected via a jointly operated international network 103. Resource brokers (referenced B) are connected to the networks and the resources available on each network are registered with the resource brokers. The resource brokers communicate data to each other via a global broker GB, so that, for example, the broker B connected to network 102 has in its registry details of
10 resources on both network 101 and network 102. The communication between brokers may be implemented, e.g., using CORBA or IIOP over IP.

In operation, the customer at terminal 100 registers their current location with the mobility application on the first application server. To do this, they dial the number associated with the service. This triggers an IDP at the SSP. The SSP
15 requests from a local broker B the address of the application required to service the call. The local broker B communicates with the global broker GB connected to network 103 to obtain interface and address data to allow the SCP to communicate with application server 1. The mobility application may, for example, require the use of an interactive voice response (IVR) system to accept data from
20 the customer. This resource is provided within network 101 by a first intelligent peripheral IP1. However, the second network includes its own IVR resources provided by a second intelligent peripheral IP2. The mobility application requests discovery of IVR resources from the broker B. After communication with the global broker GB, the broker returns detail of the IP2 that is local to the customer
25 at the current customer location. The application server 1 uses this information to return an INAP connect message to the SSP to set up a connection between the customer terminal and IP2.

CLAIMS

1. A communications service platform comprising:

a multiplicity of loosely coupled subsystems, each of the subsystems including

- 5 respective service processing resources; and
 a respective resource locator, each resource locator including means
 for communicating to others of the resource locators data indicating
 the subsystem identity and data indicating the availability of
 resources in the respective subsystem, and means for receiving
10 identity data and resource availability data for resource locators in
 others of the subsystems.

2. A platform according to claim 1, in which the resource locators are arranged to
communicate directly with each other by peer-to-peer signalling.

- 15 3. A platform according to claim 1 or 2, further comprising a resource broker and
 in which at least some communication between the resource locators is mediated
 by the resource broker.

- 20 4. A platform according to claim 3, in which the resource broker is located in one
 of the said subsystems.

5. A platform according to claim 3 or 4, in which the resource broker includes:
 a data interface arranged to receive capability
25 data and interface data from respective resource locators, and
 a registry arranged to store the said capability data and interface data

6. A platform according to any one of claims 3 to 5, in which a resource locator in
a subsystem is arranged initially to read capability data and interface data for
30 another subsystem from the resource broker, and subsequently communicates
 further data directly with the other subsystem using the interface of the subsystem
 identified in the said interface data.

7. A platform according to any one of claims 3 to 6, in which at least one of the subsystems is arranged to communicate directly with a selected other subsystem via a respective specific data interface and in which others of the subsystems are arranged to communicate with a selected other subsystem via an object bus.

5

8. A platform according to claim 7 in which the or each said subsystem arranged to communicate directly via a respective specific data interface is arranged, on initialisation of the said subsystem, to read data for the selected other subsystem from the resource broker, and in response to calls subsequent to the initialisation
10 of the subsystem, communicates directly with the selected other subsystem without reference to the resource broker.

9. A platform according to claim 7 or 8, in which the said subsystems arranged to communicate via an object bus are arranged, in response to each new call, to read
15 resource data from the resource broker.

10. A communications system comprising:

a plurality of call processing subsystems;

a network interconnecting the plurality of call processing subsystems;

20 a resource broker connected to the network, the resource broker including
a data interface arranged to receive capability
data and interface data from respective call processing subsystems, and
a registry arranged to store the said capability data and interface
data.

25

11. A communications system according to claim 10, further comprising an object bus interconnecting at least some of the call processing subsystems.

12. A communications system according to claim 11, in which communication
30 paths between others of the subsystems bypass the object bus.

13. A computing platform comprising a multiplicity of loosely coupled computing subsystems, each of the said subsystems including respective data processing resources and a respective resource locator arranged (to advertise its identity and

the loading of the respective resources and to receive resource signalling from others of the resource locators .

14. A method of operating a communications system, the system including a
5 multiplicity of processing subsystems and a network interconnecting the multiplicity of subsystems, the method comprising;

- a) communicating from a resource locator in a respective one of the multiplicity of subsystems to resource locators in others of the multiplicity of subsystems data indicating the identity of the said one subsystem and the
10 availability of resources in the said one subsystem

b) repeating step (a) for each other of the multiplicity of subsystems:

c) when one of the multiplicity of subsystems, in the course of processing a call, requires resources not present locally in the said subsystem:

- i) identifying from the said data communicated to the resource
15 locator of the said one subsystem another subsystem having the said resources;
ii) accessing the said subsystem via the network.

15. A method according to claim 14, in which, for each of the multiplicity of subsystems, step (a) is repeated regularly.

20

16. A method according to claim 15, in which the period of repetition for step (a) is small compared to the mean duration of a call processed by the communications system.

- 25 17. A method according to any one of claims 14 to 16, in which, for at least one of the multiplicity of subsystems, step (a) is repeated in response to an event in the respective subsystem.

18. A method according to claim 17, in which the said event is a change in
30 resource availability in the subsystem exceeding a predetermined threshold.

19. A method according to any one of the preceding claims in which the communication of resource data between subsystems is mediated by a resource broker.

20. A method according to claim 19, in which data is communicated between at least some of the subsystems and the resource broker via an object bus.

- 5 21. A method according to claim 20 in which data is communicated between others of the subsystems directly, bypassing the object bus.


10
11
12
13
14
15
16
17
18
19
20
21

ABSTRACT

A platform used, for example, to implement advanced services in a communications network employing an IN (intelligent network) architecture, is formed from a number of loosely coupled subsystems. Each subsystem includes a resource locator which advertises the subsystem's own resources, and listens to data identifying the resources available in other subsystems. Communication between the subsystems may be mediated by a resource broker which registers data from the different subsystems.


1/14

Figure 1

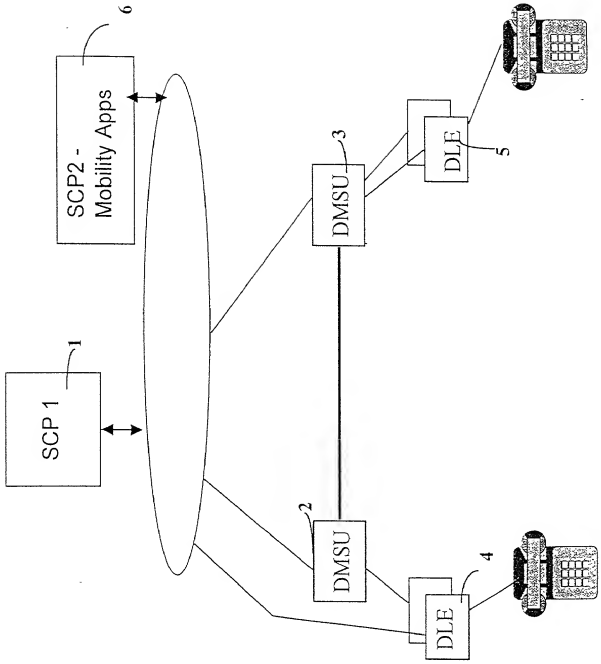


2/14

Figure 2

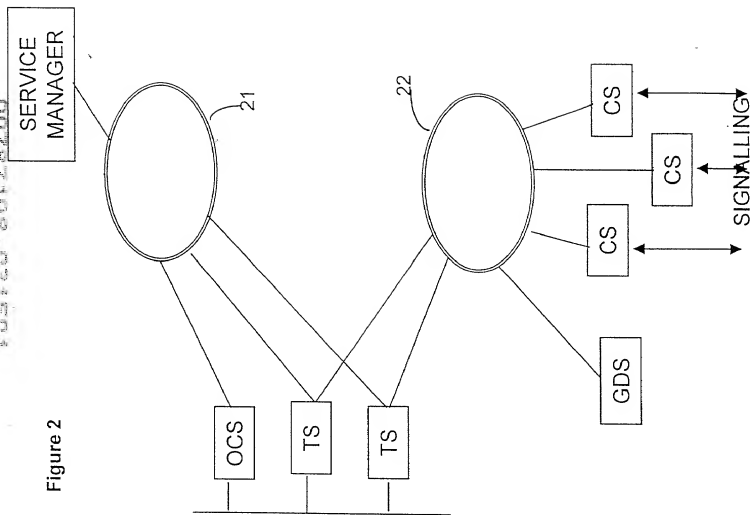


3/14

Figure 3

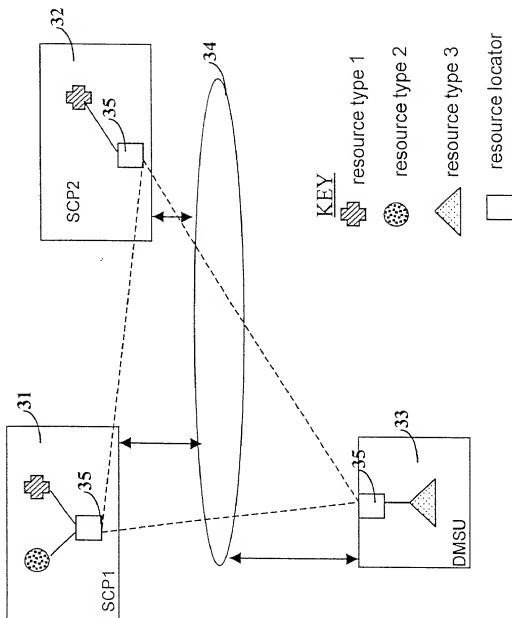

4/14

Figure 4

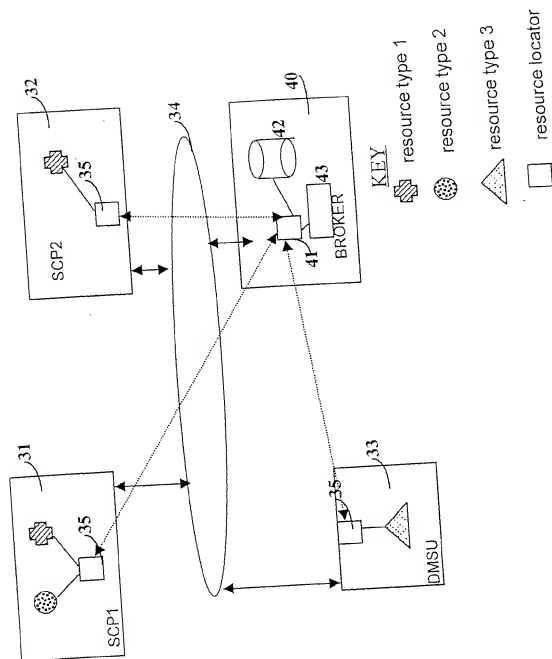

5/14


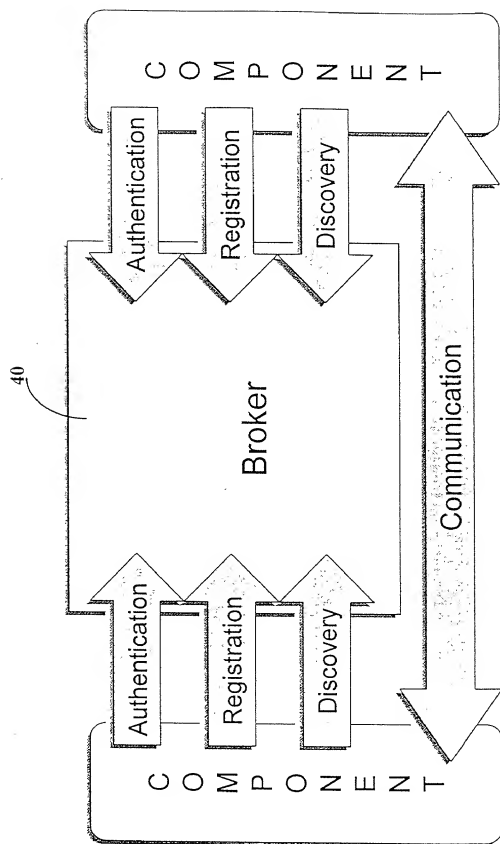


Figure 5


TESTED 8076260

Figure 6

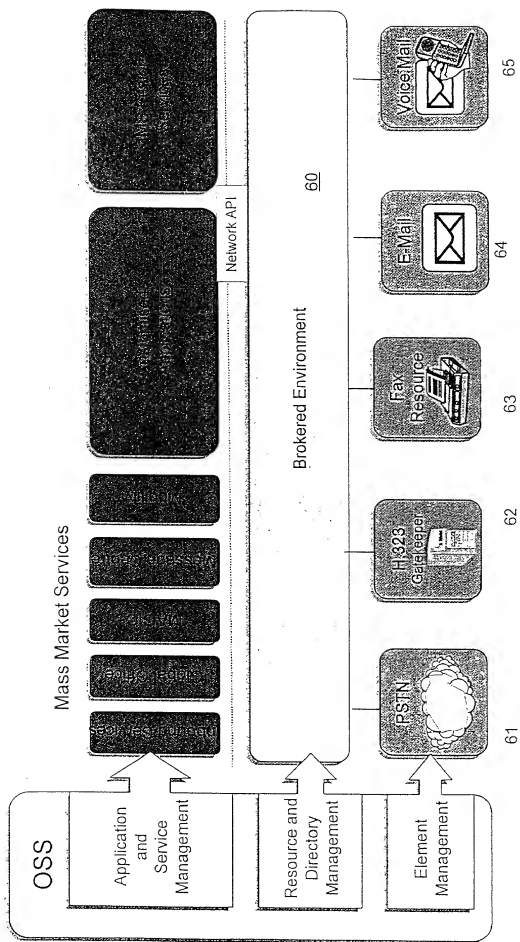

7/14

Figure 7

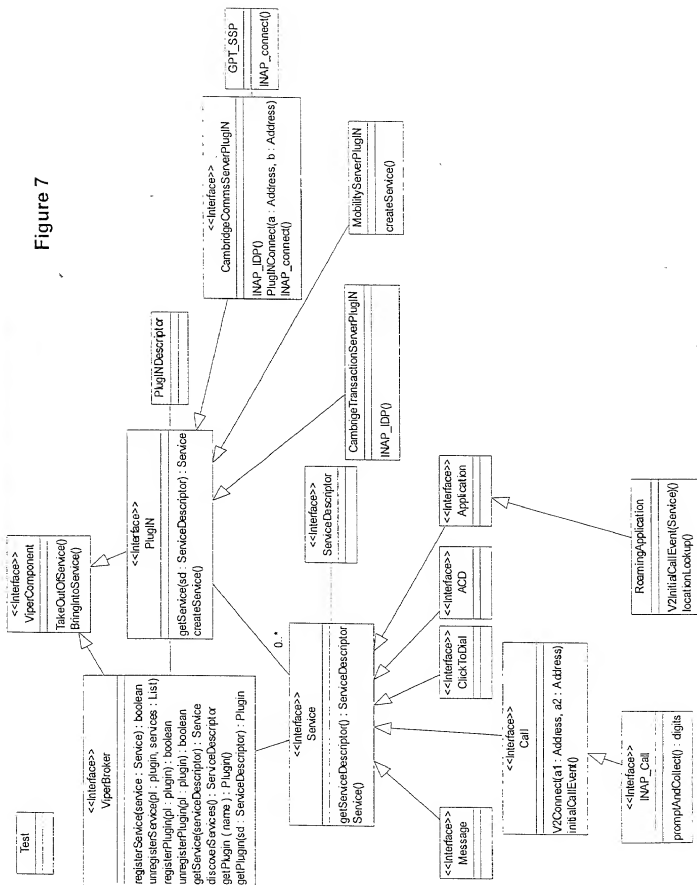

8/14

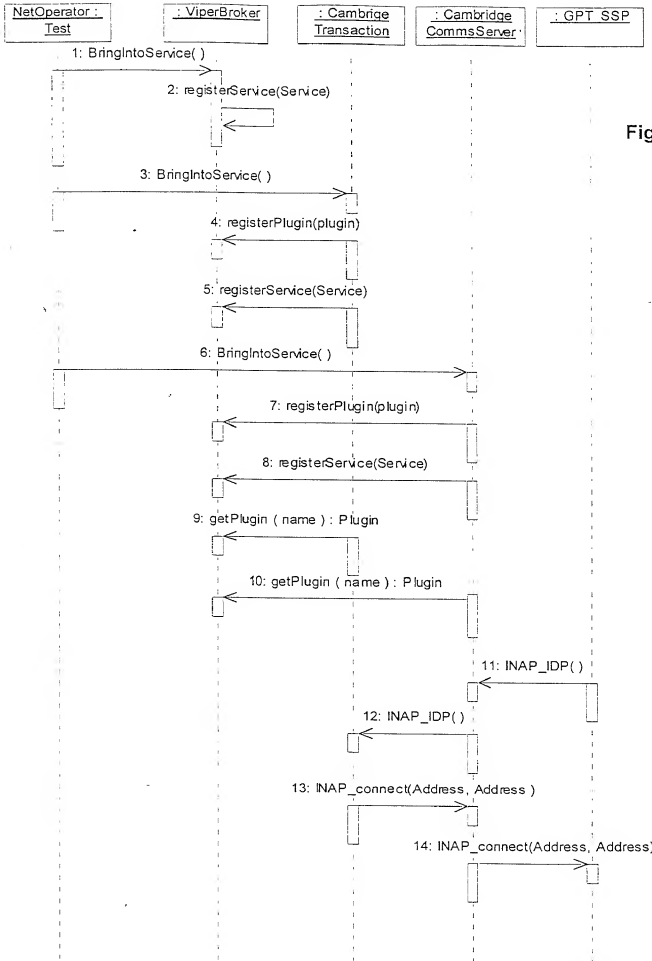


Figure 8

09/787198-03/0001

9/14

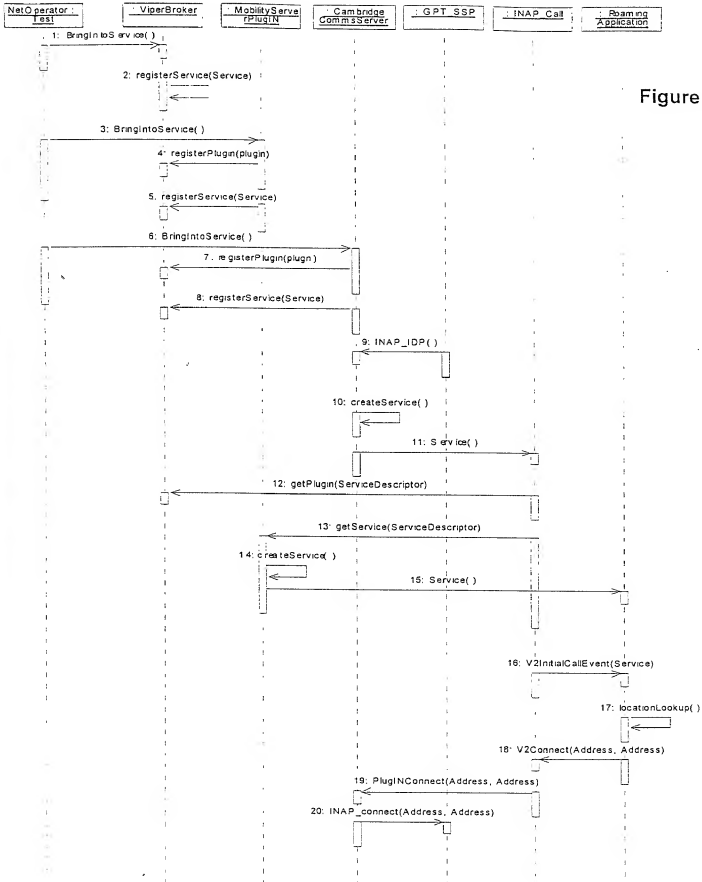
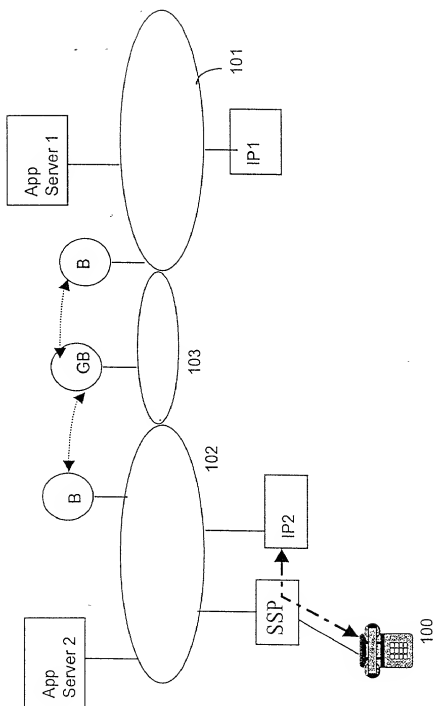



Figure 9

09/787198-03/0000


10/14

Figure
10

u/14

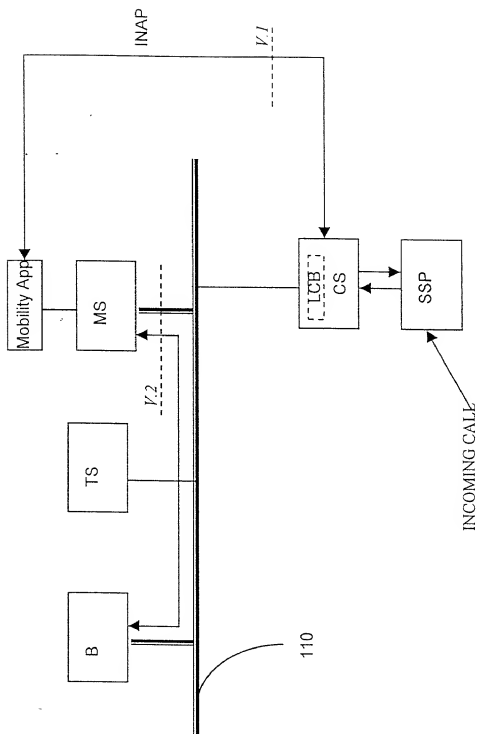
Figure
11

12/14

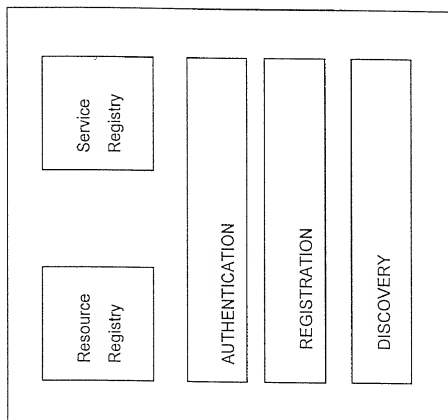Figure
12

13/14

Figure 13

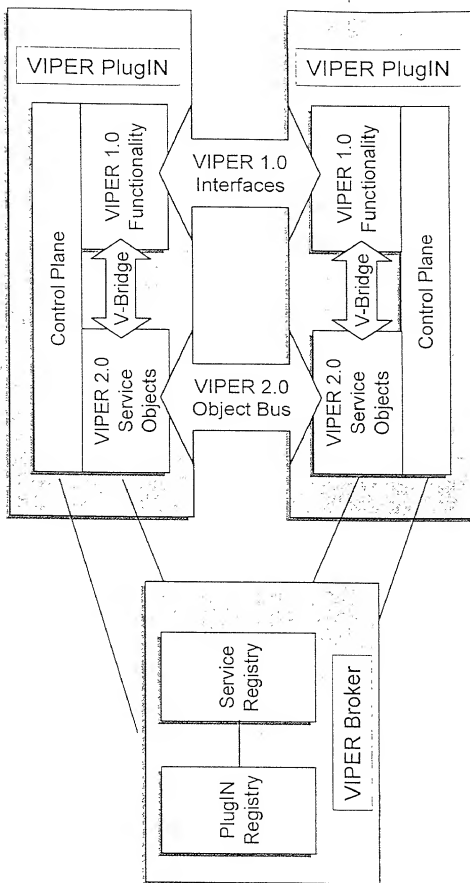

14/14

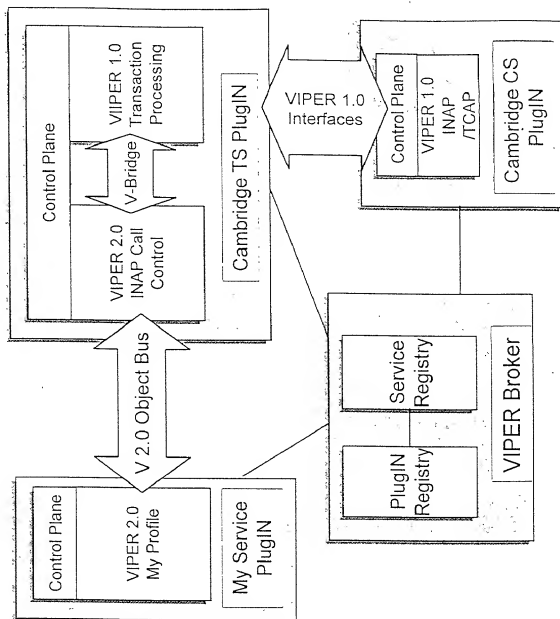


Figure 14

RULE 63 (37 C.F.R. 1.63)
DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **PROCESSING PLATFORM**
the specification of which (check applicable box(es)):
☐ is attached hereto.

☐ was filed on _____ as U.S. Application Serial No. _____
☒ was filed as PCT international application No. PCT/**GB99/03347** On **8 OCTOBER 1999**
and (if applicable to U.S. or PCT application) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 C.F.R. 1.56. I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed or, if no priority is claimed, before the filing date of this application:

Prior Foreign Application(s): Application Number	Country	Day/Month/Year Filed
98308384.1	EUROPE	14 October 1998

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.
Application Number _____ Day/Month/Year Filed _____

I hereby claim the benefit under 35 U.S.C. 120/365 of all prior United States and PCT international applications listed above or below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior applications in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. 1.56 which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

Prior U.S./PCT Application(s): Application Serial No.	Day/Month/Year Filed	Status: patented pending, abandoned
PCT/GB99/03347	8 OCTOBER 1999	PENDING

I hereby declare that all statements made herein of my own knowledge are true and that statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. And I hereby appoint **NIXON & VANDERHYE P.C., 1100 North Glebe Road, 8th Floor, Arlington, VA 22201-4714, Telephone number (703) 816-4000 (to whom all communications are to be directed)**, and the following attorneys thereof (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent: Arthur R Crawford, 25327; Larry S. Nixon, 25640; Robert A. Vanderhye, 27076; James T. Hosmer, 30184; Robert W. Faris, 31352; Richard G. Besha, 22770; Mark E. Nussbaum, 32348; Michael J. Keenan, 32106; Bryan H. Davidson, 30251; Stanley C. Spooner, 27393; Leonard C. Mitchard, 29009; Duane M. Byers, 33363; Paul J. Henon, 33626; Jeffrey H. Nelson, 30481; John R. Lastova, 33149; H. Warren Burnam, Jr., 29266; Thomas E. Byrne, 32205; Mary J. Wilson, 32955; J. Scott Davidson, 33489; Alan M. Kagen, 36178; William J. Griffith, 31260; Robert A. Molan, 29834.

1. ¹⁻⁰⁰ Inventor's Signature: S. A. Beddus Date: 22/12/99
Inventor: SIMON ALEXANDER BEDDUS **BRITISH**
(first) MI (last) (citizenship)
Residence: (city) SUEFOLK GBN (state/country) GREAT BRITAIN
Post Office Address: 35 GROVE LANE, IPSWICH, SUFFOLK,
GREAT BRITAIN
(Zip code) IP4 1NX

2. ²⁻⁰⁰ Inventor's Signature: G. Bruce Date: 22/12/99
Inventor: GARY LESLIE BRUCE **BRITISH**
(first) MI (last) (citizenship)
Residence: (city) SUEFOLK GBN (state/country) GREAT BRITAIN
Post Office Address: 34 HAUGATE CLOSE, WOODBRIDGE, IPSWICH, SUFFOLK, GREAT BRITAIN
(Zip code) IP12 1LQ

-2-

3. 3-00
Inventor's Signature: *Handing* Date: 23/12/1999
Inventor: TOBY ALEXANDER HARDING
(first) (last)
Residence: (city) ESSEX GBN (state/country) GREAT BRITAIN
Post Office Address: 42 TITUS WAY, COLCHESTER, ESSEX, GREAT BRITAIN
(Zip code) CO4 5GD
4. 4-00
Inventor's Signature: *John* Date: 22/12/99
Inventor: CHRISTOPHER JOHN FENTON
(first) (last)
Residence: (city) SUFFOLK GBN (state/country) GREAT BRITAIN
Post Office Address: 1 BELGRAVE CLOSE, IPSWICH, SUFFOLK, GREAT BRITAIN
(Zip code) IP4 2TT
5. 5-00
Inventor's Signature: *John* Date: 7/1/2000
Inventor: JOHN ANDREW LYLE
(first) (last)
Residence: (city) SUFFOLK GBN (state/country) GREAT BRITAIN
Post Office Address: 48 KELVEDON DRIVE, RUSHMERE ST ANDREW, IPSWICH, SUFFOLK, GREAT BRITAIN
(Zip code) IP4 5LQ